

BUILDING PAPER/HOUSE WRAP/FLASHING

30/30/30 RATAN ASPHALT LAMINATED KRAFT GRADE B PAPER

An ideal asphalt laminated paper for a moisture barrier under hardwood floors and for stucco backing in garages where interior studding is exposed. Also used as a backing for ceramic tile and stone veneering, as well as a good work-over and masking paper for general utility purposes.

Moderate water vapor resistance. 16 hour water resistance. 2 sheets of Bs 30 kraft paper laminated with 30lbs per ream of high melt point asphalt; low sulphur and virtually odor free. Meets federal Spec. UU-B-790a, Type 1, Grade B, Style 1a, and UBC Standard 17-1.

Size	Code
3' x 500sq/FT	91KRFT



DOUBLE RATAN BLACKRAFT ASPHALT SATURATED KRAFT (SHEATHING)

Two sheets of Blackraft in the same roll. Two layers go up in one application. Water vapor permeable, water repellent. 26#/MSF Natural Kraft paper saturated with high quality, low sulphur asphalt, virtually odorless. Meets Federal Spec. UU-B-790a, Type 1, Grade D, Style 2 as required in UBC Sec. 4706 (d) Exterior Lath, Weather-resistant Barriers, Uniform Building Code and Uniform Building Standard No. 17-1. 40" wide, 500 and 324sq/FT per roll.

Size	Code
40"x250'	91KRFP



RATAN RED ROSIN SIZED SHEATHING


Inexpensive, non-staining, limited water resistance, water vapor permeable. 36"x500sq/FT .010 thickness. Cover sheet, deadening in floor structures, slip sheet in built up roofs, floor protection, "drop cloth," under rigid foam in roof structures.

Size	Code
3' x 500sq/FT	91KRFR



INSULATION SUPPORT NETTING

- Supports Insulation.
- Ceilings
- Kneewalls
- Under floors.
- Staple for permanent support.
- 1"x 2" mesh



Size	Code
4'x250'	90R425

PAPER BACK STUCCO NETTING

- Self-furring galvanized 17 Gauge 1 1/2" mesh stucco wire or galvanized expanded metal lath.
- 15lb. felt moisture barrier lapped to drain.




Size	Code
37 1/2" x 100'	91KRFW

BUILDING PAPER/HOUSE WRAP/FLASHING

CEDAR BREATHER

- Allows for a continuous air space between roof deck and shingles.
- Eliminates excessive moisture.
- Reduces potential rotting and warping.
- Allows entire underside of shingle to dry.

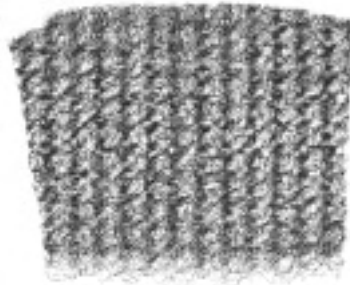

Size	Code
200sq/FT.	9115CB

ASPHALT SATURATED FELT PAPER

Standard duty.



Size	Description	Code
325sq/FT	15# Felt Paper ASTM Approved	9115RF
218sq/FT	30# Felt Paper ASTM Approved	9130RF

BACKER ROD

- Easy to install.
- Ideal for irregular joints.
- Economical

Surface Preparation: Clean joint of any obstructions. All joint surfaces must be dry.

Application: Select a PL Backer Rod size approximately 25% larger that the joint opening, to prevent sealant from passing on either side. Push the Backer Rod into the joint with a blunt tool or a finger, keeping uniform depth. For best results, Backer Rod should be installed at one-half the width of the joint, not to exceed 1/2" depth or less than 1/4".


Maximum joint size should be 3/16".



Size	Qty.	Code
3/8" x 20'	EA	91BR03
5/8" x 20'	EA	91BR05

HOME SLICKER

Home Slicker is the superior solution for providing a rainscreen for wall systems that is easily applied and provides a continuous, vertically channeled air and drainage space along the entire exterior wall. Home Slicker can lower moisture levels in siding and cladding systems, but is especially effective for wood, fiber-cement, EIFS, and brick. Home Slicker helps to preserve the exterior cladding, plywood, OSB, housewraps and building papers, as well as paints and stains.

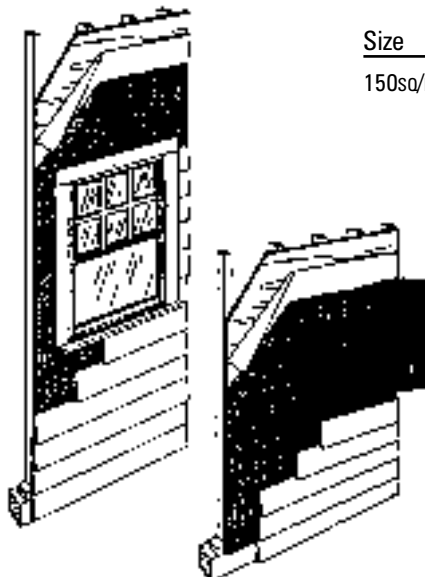

Size	Code
150sq/FT	9115CS

Specifications

Width	39.37 in. (1 meter)
Length	46 1/2 ft.
Coverage	150sq/FT ± 2sq/FT
Height/Thickness	0.25 in.
Weight	7.2 lbs. per roll 7.0 oz./sq/yd
Matrix Design	8 channels per 4 in. (2 channels per in.)
Warranty	40 Year limited

BUILDING PAPER/HOUSE WRAP/FLASHING

SLICKER SCREEN

This mesh screen is used to prevent insects from access between the sheathing and the siding.



Size	Code
6"x100"	9115CT

TYPAR HOUSEWRAP

- Typar HouseWrap survives the rigors of construction and won't tear in the wind or degrade in the sun.
- It's easy to handle and cut. Convenient stud markings show you where to nail to speed installation.
- Glare resistant color.
- Unconditionally guaranteed to perform.



Size	Code
9'x100' 900sq/ft	91TYVK

TYPAR TAPE

For sealing joints on Typar.



Size	Code
1 7/8"x165'	91TYVT

PAPER WINDOW FLASHING

- Every structure is susceptible to dust, air and/or moisture.
- Regardless of whether the exterior is
 - stucco
 - wood
 - brick
 - or various siding materials,
 the elements represent real potential problems in damage and energy loss.



Size	Code
6"x300'	91UF06
9"x300'	91UF09

POLYFLASH WINDOW FLASHING

The polyethylene coating installed facing out provides superior water resistance for the time lapse before windows are installed and stucco or siding is applied.

Some window manufactures and construction authorities favor the POLYFLASH product as the paper back (next to the wood) has less tendency to attract condensation.



Size	Code
6"x300'	91UF04
9"x300'	91UF05

TYPAR FLASHING PEEL AND STICK

- Butyl-based
- Compatible with Sikaflex
- Ideal for straight jambs and heads of windows and doors



Size	Code
6"x75'	91TYP56
9"x75'	91TYP59

BUILDING PAPER/HOUSE WRAP/FLASHING

TYPAR FLASHING FLEX

Works best for window sills and around curved windows.



Size	Code
6"x75'	91TYFL6
9"x75'	91TYFL9

ROLLED FURRING STRIPS

- Use to fur out-of-plumb rough framing for a smooth drywall installation.
- Use around windows for easier trim installation.
- Creates a true plane for hanging kitchen cabinets.



Size	Qty	Code
1/16" x 2"	EA	9115FS

PROTECTO SEAL 45

- Self adhering all purpose peel and stick exposable aluminized water proofing membrane.
- SBS modified rubberized asphalt.



Size	Code
2"x50'	91JA44
4"x50'	91JA45
6"x50'	91JA46
9"x50'	91JA49
12"x50'	91JA50

PROTECTO SUPER STICK BUILDING TAPE

High tack, peel and stick air/vapor barrier tape system.

- No Primer needed
- Creates total air and water seal
- Self seals around nails, screws, and staples



Roll Size	Code
4"x75'	91SS04
6"x75'	91SS06
9"x75'	91SS09
12"x75'	91SS12

TYVEK HOMEWRAP

- Helps protect a home against damaging wind and rain
- Allows moisture vapor to pass through to help promote drying
- Helps prevent mold and mildew growth



Size	Qty	Code
9'x150'	EA	91TYVK1

TYVEK TAPE

- Strong
- High-tack
- Waterproof
- Impact resistant
- Conformable



Size	Qty	Code
2"x165'	EA	91TYVKT

BUILDING PAPER/HOUSE WRAP/FLASHING

JIFFY SEAL WATERPROOF MEMBRANE

Inert, inorganic, and will never rot, decay, or be affected by bacteria or fungus.



Size	Code
12"x50'	91JS12
30"x50'	91JS30

BUILDING TAPE 20

A new and superior self-adhering, air and moisture barrier for vertical and horizontal above grade substrates. This 20mil polyethylene-backed SBS modified rubberized asphalt membrane can be applied to

- aluminum
- wood
- vinyl
- concrete
- block surfaces



Size	Code
6"x100'	91BT20
9"x100'	91BT22
12"x75'	91BT25

GRACE VYCOR DECK PROTECTOR

Grace Vycor Deck Protector is the first uniquely formulated solution to help reduce corrosion of galvanized metal connectors. It is installed between the connector and the pressure-treated wood and acts as a barrier layer to break the electric circuit and thus helps reduce corrosion.

- Improves durability of deck structures
- Enhances deck aesthetics and longevity
- Minimizes unnecessary repairs and costly call-backs
- Provides inexpensive protection (approximately \$50 material cost for a 400 sq. ft. deck)
- Provides fast and easy to use solution

Size	Code
4"x75'	91GV40
9"x75'	91GV90



ADHESIVE FLOOR MATS

STOP DIRT WHERE IT STARTS! Tacky walk-on surface cleans dust and dirt from shoes prior to entering or before exiting the jobsite. Each mat has 30 layers, which are individually tabbed for easy removal. When the top sheet becomes too dirty, peel it away to expose the next clean layer. Adhesive Floor Mats can be used with or without the green mat frame.



Size	Qty	Code
24"x36"	4 Mats/30 Sheets	91LTAKY